

Bild / Picture




USB 3.2 Gen1 ExpressCard Karte mit 2 Ports (NEC Chip-Set)

Beschreibung

Die EX-1232 USB 3.2 Gen1 ExpressCard Karte stellt zwei Ultra High-Speed USB 3.0 Ports zur Verfügung. Sie ist entwickelt worden um zwei weitere USB 1.1, 2.0 oder 3.2 Gen1 Endgeräte an Ihr Notebook anzuschließen. Sie unterstützt USB 1.1 Low-Speed (1.5Mbps), Full-Speed (12Mbps), USB 2.0 High-Speed (480Mbps) und USB 3.2 Gen1 Super-Speed (5Gbps). Sie ist die perfekte Technologie für Externe Speicher Gehäuse, Digitale Kameras, Webcam, Scanner und mehr. Mit der EX-1232 wird ein ExpressCard Kit 34/54mm (EX-10000) mitgeliefert der die ExpressCard seitlich in einem 54mm stabilisiert.

Merkmale

Anwendung / Application

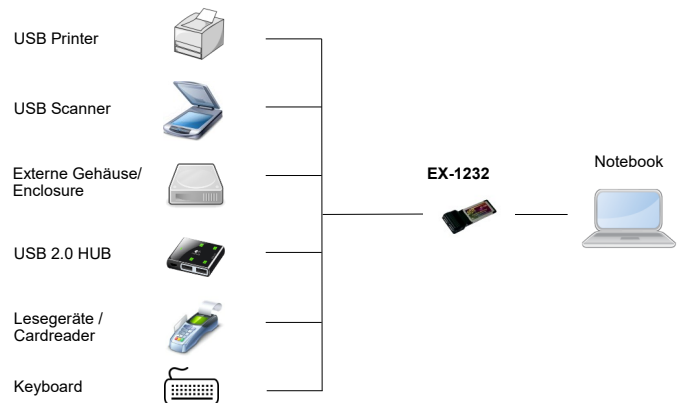

USB 3.2 Gen1 ExpressCard board with 2 ports (NEC chipset)

Description

The EX-1232 USB 3.2 Gen1 ExpressCard card offer you two Super-Speed USB 3.2 Gen1 ports. The EX-1232 it's design for connect two more USB 1.1, 2.0 or 3.2 Gen1 peripheral device. She support USB 1.1 Low-Speed (1.5Mbps), Full-Speed (12Mbps), USB 2.0 High-Speed (480Mbps) and USB 3.2 Gen1 Super-Speed (5Gbps). It is an ideal technology for external storage devices, digital cameras, webcams, scanners and much more. With the EX-1232 it's included a ExpressCard Kit 34/54mm (EX-10000) what give the ExpressCard a lateral stability.

Features

• USB 3.2 Gen1 ExpressCard Karte mit zwei Anschlüssen	• USB 3.2 Gen1 ExpressCard card with two ports
• Kompatibel zu Microsoft Windows Standard Open HCD Treiber	• Compatible to Microsoft Windows Standard Open HCD Driver
• Unterstützt bis zu 123 Geräte	• Support up to 123 devices
• Vollständig konform mit ExpressCard Vers 1.0 Spezifikationen	• Fully Compliant with ExpressCard vers. 1.0 specifications
• USB 1.1 und 2.0 abwärtskompatibel	• USB 1.1 and 2.0 backward compatible
• Hot Swapping	• Hot Swapping
• Plug-and-Play	• Plug-and-Play

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Chip-Set:	NEC uPD720200	Chip-Set:	NEC uPD720200
Datentransfer-Rate:	Low-Speed (1.5Mbps) / Full-Speed (12Mbps) High-Speed (480Mbps) Super-Speed (5Gps)	Data transfer rate:	Low-Speed (1.5Mbps) / Full-Speed (12Mbps) High-Speed (480Mbps) Super-Speed (5Gps)
Anschlüsse:	2x USB 3.2 Gen1 A-Buchse	Connectors:	2x USB 3.2 Gen1 A-female
Hardwaresysteme:	ExpressCard Slot	Hardware system:	ExpressCard slot
Benötigt Treiber für:	Win2000 bis SP2, Win XP ohne SP und Win 7	Need driver for:	Win2000 bis SP2, Win XP without SP and Win 7
Betriebssysteme:	Win2000/XP/Vista/7/8.x/10 (32&64-Bit), Linux	Operating systems:	Win2000/XP/Vista/7/8.x/10 (32&64-Bit), Linux
Betriebstemperatur :	0°C bis +55°C	Operating temperature :	32°F up to 131°F
Lagertemperatur:	-20°C bis +85°C	Storage temperature:	-20°F up to 167°F
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Abmessung:	116.00 x 34.00 mm	Size:	116.00 x 34.00 mm
Gewicht:	200 g	Weight:	200 g
EAN:	4718359012327	EAN:	4718359012327
Ursprungsland:	Taiwan	Country of origin:	Taiwan
Lieferumfang:	EX-1232, ExpressCard (EX-10000), USB Power Kabel, Treiber CD, Handbuch	Packaging contents:	EX-1232, ExpressCard (EX-10000), USB power cable, Driver CD, Manual

Erklärung USB Bezeichnungen und Geschwindigkeiten / Explanation USB lable and speed

Version	Bisherige Bezeichnung / Previous designation	Geschwindigkeit / Speed
1.1	—	12 Mbit/s.
2.0	—	480 Mbit/s.
3.2 Gen1	3.1 Gen1 / 3.0	5 GBit/s.
3.2 Gen2	3.1 Gen2	10 GBit/s.
3.2 Gen 2x2	—	20 GBit/s.