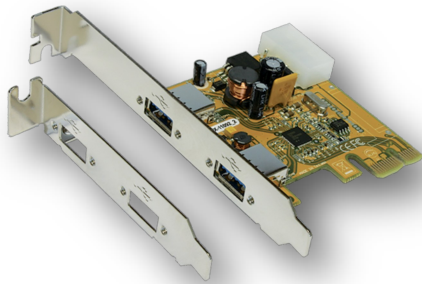


Bild / Picture

USB 3.2 Gen 1 PCI-Express Karte mit 2 Ports
(Renesas Chipsatz)


Beschreibung

Die EX-11092-2 USB 3.2 Gen 1 PCIe Karte (früher genannt USB 3.0) stellt zwei externe Super-Speed USB 3.2 Gen 1 Ports zur Verfügung. Sie wurde entwickelt um zwei weitere USB 1.1, 2.0 oder 3.2 Endgeräte an Ihre Workstation, Desktop oder Server anzuschließen. Sie unterstützt USB 1.1 Low-Speed (1.5 mbps), Full-Speed (12Mbps), USB 2.0 High-Speed (480Mbps) und USB 3.2 Gen 1 Super-Speed (5Gbps). Zur Unterstützung des Stromes von 900mA an den externen USB 3.2 Gen 1 Ports, benötigt man keinen zusätzlichen Stromanschluss vom PC-Netzteil. Mit der EX-11092-2 wird ein Low Profile Bügel mitgeliefert für schmale Gehäuse bis zu einer maximaler Bauhöhe von 8 cm. Die Treiber können von der Webseite heruntergeladen werden: www.exsys.de / www.exsys.ch / www.exsys.it

Merkmale

• USB 3.2 Gen 1 PCIe Karte mit zwei externen Anschlüssen
• Kompatibel mit USB 3.2 Gen 1 und Intel xHCI Spezifikationen
• Unterstützt alle USB kompatiblen Datenübertragungstypen wie zum Beispiel Control/Bulk/Interrupt/Isochronous
• Unterstützt bis zu 123 Geräte
• Vollständig konform mit PCI Express Gen2 Spezifikationen
• USB 1.1 und 2.0 abwärtskompatibel
• Hot Swapping
• Plug-and-Play

Anwendung / Application

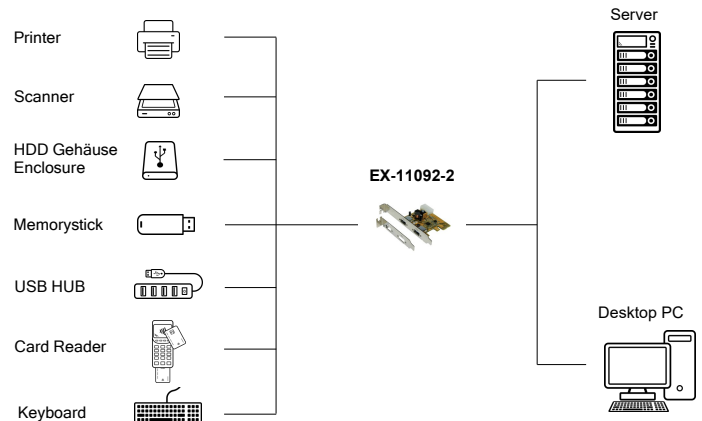USB 3.2 Gen 1 PCI-Express Card with 2 Ports
(Renesas Chipset)

Description

The EX-11092-2 USB 3.2 Gen 1 PCIe card (formerly called USB 3.0) provides two external super-speed USB 3.2 Gen 1 ports. It is designed to connect two additional USB 1.1, 2.0 or 3.2 end devices to your workstation, desktop or server. It supports USB 1.1 low-speed (1.5Mbps), full-speed (12Mbps), USB 2.0 high-speed (480Mbps) and USB 3.2 Gen 1 super-speed (5Gbps). To support the current of 900mA on the external USB 3.2 Gen 1 ports, you don't need an additional power connection from the PC power supply. A low profile bracket is included with the EX-11092-2 for slim cases up to a maximum height of 8cm. The drivers can be downloaded from the website: www.exsys.de / www.exsys.ch / www.exsys.it

Features

• USB 3.2 Gen 1 PCIe card with two external ports
• Compliant with USB 3.2 Gen 1 and Intel xHCI specification
• Supports all USB compliant data transfer type such as Control/Bulk/Interrupt/Isochronous
• Supports up to 123 device
• Fully Compliant with PCI Express Gen2 Specifications
• Downwards compatible with USB 2.0 and 1.1
• Hot Swapping
• Plug-and-Play


System / OS



Geprüft / Approved



Verpackung / Packaging



Spezifikation

Specification

Chipsatz:	Renesas uPD720202	Chipset:	Renesas uPD720202
Datentransferrate:	Low-Speed (1.5Mbps) / Full-Speed (12Mbps) High-Speed (480Mbps) Super-Speed (5Gbps)	Data Transfer Rate:	Low-Speed (1.5Mbps) / Full-Speed (12Mbps) High-Speed (480Mbps) Super-Speed (5Gbps)
Anschlüsse:	2x USB 3.2 Gen 1 A-Buchse (extern) 1x 4-Pin Molex Power Anschluss	Connectors:	2x USB 3.2 Gen 1 A-Female (external) 1x 4-Pin Molex Power Connector
Hardwaresysteme:	PCIe x1 bis x16 Slot	Hardware System:	PCIe x1 up to x16 Slot
Betriebssysteme:	Windows XP / 7 / 8.x / 10 / 11 / Server 20xx / Linux / Mac	Operating Systems:	Windows XP / 7 / 8.x / 10 / 11 / Server 20xx / Linux / Mac
Betriebstemperatur:	0°C bis +55°C	Operating Temperature :	32°F up to 131°F
Lagertemperatur:	-20°C bis +85°C	Storage Temperature:	-20°F up to 167°F
Rel. Luftfeuchtigkeit:	5% bis 95%, nicht kondensierend	Rel. Humidity:	5% to 95%, non-condensing
Abmessung:	65.00 x 61.00 mm	Size:	65.00 x 61.00 mm
Gewicht:	45g	Weight:	45g
EAN:	4718359119293	EAN:	4718359119293
Ursprungsland:	Taiwan	Country of Origin:	Taiwan
Lieferumfang:	EX-11092-2, Low Profile Bügel, Handbuch	Packaging Contents:	EX-11092-2, Low Profile Bracket, Manual