



Bild / Picture

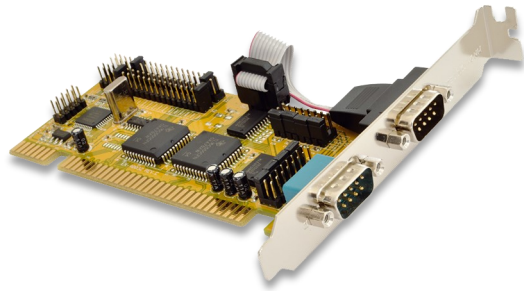

2S Seriell RS-232 ISA 16-Bit Karte

Anwendung / Application

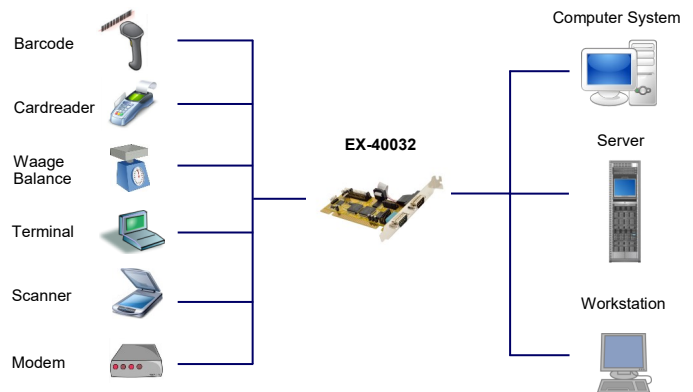

2S Serial RS-232 ISA 16-Bit card

Beschreibung

Die EX-40032 ISA I/O Karte stellt zwei serielle RS-232 High Performance UART 16C550 Ausgänge zur Verfügung. Sie ist entwickelt worden um zwei weiteren Seriellen Ports für PC, kleine Workstation oder Server über den ISA Bus zu erweitern. Zusätzlich ist +5V oder +12V auf Pin 9 des seriellen Steckers konfigurierbar für ein POS System (Power over System). Die EX-40032 hat zwei innenliegende 10 Pin Pfostenstecker für internen Anschluss.

Description

The EX-40032 ISA I/O adapter provides two high performance 16C550-type UART RS-232 serial ports. It is designed for PC, thin client or server to provide instant COM port expansion via the ISA Bus. It provides +5V and +12V via the pin 9 from the male connector for a POS System (Power over System). The EX-40032 has two internal 10 pin pole plug for connect internal device.

Merkmale

- Schnittstelle: RS232 V.24
- FIFO Buffer: 16C550 mit 256Byte
- ±15kV IEC1000-4-2 ESD Schutz für RS232 I/O's
- I/O Adressen: 3F8, 2F8, 3E8, 2E8, 250, 258 und 260
- Interrupt (IRQ): 3, 4, 5, 6, 7, 9,10, 11, 12, 14, 15
- Daten Bits: 5, 6, 7, 8 / Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

Features

- Interface: RS232 V.24
- FIFO Buffer: 16C550 with 256Byte
- ±15KV IEC1000-4-2 ESD Protection for RS232 I/O's
- I/O addresses: 3F8, 2F8, 3E8, 2E8, 250, 258 and 260
- Interrupt (IRQ): 3, 4, 5, 6, 7, 9,10, 11, 12, 14, 15
- Data Bits: 5, 6, 7, 8 / Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

Spezifikation

Chip-Set:	TL 16550CFN
Datentransfer-Rate:	300Baud bis 115.2KBaud
Anschlüsse:	2 x 9 Pin Seriell RS-232 Stecker
Hardwaresysteme:	ISA 8- oder 16-Bit Slot
Treiber:	Es werden keine Treiber benötigt
Betriebstemperatur :	0°C bis +55°C Celsius
Lagertemperatur:	-40°C bis +75°C Celsius
Rel. Luftfeuchtigkeit:	5% bis 95%
Stromversorgung:	+5Volt über den PCI-Slot
Abmessung:	128.00 x 55.00 mm
Gewicht:	150 g
EAN:	4718359400322
Ursprungsland:	Taiwan
Lieferumfang:	EX-40032, Handbuch

Specification

Chip-Set:	TL 16550CFN
Data transfer rate:	300Baud up to 115.2KBaud
Connectors:	2 x 9 pin serial RS-232 male
Hardware system:	ISA 8- or 16-Bit slot
Driver:	Don't need driver
Operating temperature :	32°F up to 131°F Fahrenheit
Storage temperature:	-40°F up to 167°F Fahrenheit
Rel. Humidity:	5% to 95%
Current Supply:	+5V over the PCI-slot
Size:	128.00 x 55.00 mm
Weight:	150 g
EAN:	4718359400322
Country of origin:	Taiwan
Packaging contents:	EX-40032, Manual

System / OS



Geprüft / Approved



Verpackung / Packaging

