



Bild / Picture

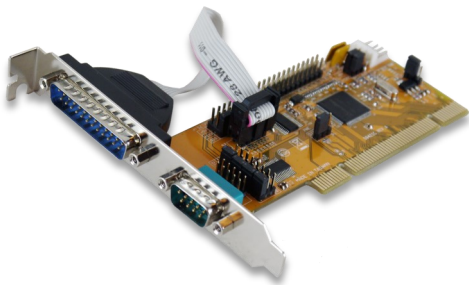

2S Seriell RS-232 PCI Karte
mit 9/25 Pin Anschluss (SystemBase Chip-Set)

Anwendung / Application

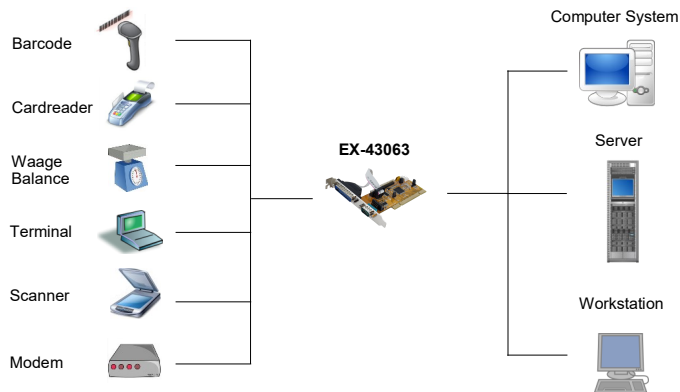

2S Serial RS-232 PCI card
with 9/25 pin connector (SystemBase Chipset)

Beschreibung

Die EX-43063 PCI I/O Karte stellt eine 9 Pin sowie 25 Pin serielle RS-232 High Performance UART 16C1050 Ausgang zur Verfügung. Sie ist entwickelt worden um zwei weitere Serielle Ausgänge für PC, kleine Workstation oder Server über den PCI- oder PCI-X Bus zu erweitern. +5V und +12V sind auf Pin 9 des seriellen Stecker konfigurierbar POS System (Power over System). Mit der EX-43063 werden zwei Low Profile Bügel für schmale Computer Gehäuse bis 8 cm Bauhöhe mitgeliefert.

Description

The EX-43063 PCI I/O adapter provides one 9 pin and 25 pin high performance 16C1050-type UART RS-232 serial ports. It is designed for PC, thin client or server to provide instant COM port expansion via the PCI- or PCI-X Bus. The card is fully Plug-and-Play compatible. It provides +5V and +12V over the 9 pin POS System (Power over System). With the EX-43063 we include two low profile bracket for small computer case up to 8 cm.

Merkmale

Schnittstelle: RS232 V.24
FIFO Buffer: 16C1050 mit 256Byte
±15kV IEC1000-4-2 ESD Schutz für RS232 I/O's
I/O Adressen und Interrupt wird vom System BIOS vergeben
Daten Bits: 5, 6, 7, 8
Stop Bits: 1, 1.5, 2
Parity: none, even, odd, space, mark
Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
+5V und +12V ist auf Pin 9 vom Seriellen Stecker einstellbar
Unterstützt Motherboard mit 5V und 3.3V

Features

Interface: RS232 V.24
FIFO Buffer: 16C1050 with 256Byte
±15KV IEC1000-4-2 ESD Protection for RS232 I/O's
I/O addresses and Interrupt will set from the system BIOS, IRQ sharing
Data Bits: 5, 6, 7, 8
Stop bits: 1, 1.5, 2
Parity: none, even, odd, space, mark
Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
+5V and +12V is adjustable on pin 9 of the serial connector
Support Motherboard with 5V and 3.3V

System / OS



Geprüft / Approved



Verpackung / Packaging



Spezifikation

Specification

Chip-Set:	SystemBase 16C1053APCI	Chip-Set:	SystemBase 16C1053APCI
Datentransfer-Rate:	300Baud bis 921.6KBaud	Data transfer rate:	300Baud up to 921.6KBaud
Anschlüsse:	1 x 9- und 25 Pin Seriell RS-232 Stecker 1 x 4 Pin Strom Stecker	Connectors:	1 x 9- and 25 pin serial RS-232 male 1 x 4 pin power connector
Hardwaresysteme:	PCI 32-Bit oder PCI-X 64-Bit Slot	Hardware system:	PCI 32-bit or PCI-X 64-bit slot
Treiber:	Win2000/XP/Vista/7/8.x/10 (32&64) Server 200x & 20xx, Linux, SCO-Unix	Driver:	Win2000/XP/Vista/7/8.x/10 (32&64) Server 200x & 20xx, Linux, SCO-Unix
Betriebssysteme:	Gemäß Treiber	Operating systems:	In accordance with driver
Betriebstemperatur :	0°C bis +55°C Celsius	Operating temperature :	32°F up to 131°F Fahrenheit
Lagertemperatur:	-40°C bis +75°C Celsius	Storage temperature:	-40°F up to 167°F Fahrenheit
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	+5Volt über den PCI-Slot	Current Supply:	+5V over the PCI-slot
Abmessung:	125.00 x 39.00 mm	Size:	125.00 x 39.00 mm
Gewicht:	190 g	Weight:	190 g
EAN:	4718359430633	EAN:	4718359430633
Ursprungsland:	Taiwan	Country of origin:	Taiwan
Lieferumfang:	EX-43063, Treiber CD, Handbuch	Packaging contents:	EX-43063, Driver CD, Manual