


Bild / Picture

Anwendung / Application

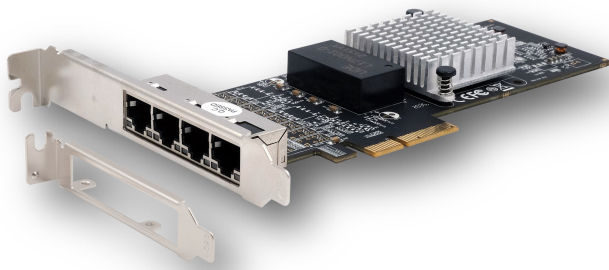


Gigabit LAN PCIe Karte mit 4 Ports inkl. LP Bügel (Intel Chipsatz)

Beschreibung

Die EX-60204 ist eine 1 Gigabit Ethernet Karte mit vier RJ45 Ports für den PCIe Bus. Sie unterstützt Half- und Full-Duplex sowie Auto-Negotiation zur automatischen Anpassung an die Geschwindigkeit im Netzwerk (10/100/1000 Mbit/s). Der verwendete Intel Ethernet-Controller garantiert höchste Qualität und Zuverlässigkeit.

Merkmale

• Unterstützt 10/100/1000 Base-T Ethernet Standard
• Unterstützt 4-Lane 2.5 + 5 GT/s PCI Express Bus
• Voll kompatibel mit PCI Express 2.0
• Unterstützt Jumbo Frames bis 9KBytes
• Automatische Cross-Over-Erkennung (MDI/ MDI-X)
• Unterstützt Preboot eXecution Environment (PXE)
• Unterstützt Legacy und Message Signal Interrupt (MSI/MSI-X)
• IEEE 802.3-Auto-Negotiator - Automatische Verbindungskonfiguration für Geschwindigkeit, Duplex und Flusskontrolle
• Zeitstempelung und IEEE 1588 Precision Time Protocol
• IEEE 802.3az - Energieeffizientes Ethernet (EEE)
• Active State Power Management (ASPM)
• Vollständige Wake-up-Unterstützung (APM/ACPI)
• Latenz-Toleranz-Berichterstattung (LTR)
• LED Anzeige für Aktivität und Datenübertragungsmodus
• Original Intel Chipsatz, fabrikneu, keine refurbished / B-Ware

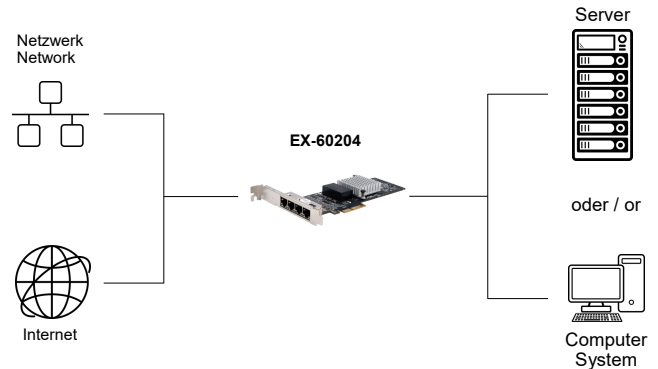

Gigabit LAN PCIe card with 4 ports incl. LP bracket (Intel chipset)

Description

The EX-60204 is a 1 Gigabit Ethernet card with four RJ45 ports for the PCIe bus. It supports half and full duplex as well as auto-negotiation for automatic adaptation to the network speed (10/100/1000 Mbps). The Intel Ethernet controller used ensures the highest quality and reliability.

Features

• Supports 10/100/1000 Base-T Ethernet standard
• Supports 4-lane 2.5 + 5GT/s PCI Express bus
• Fully compliant with PCI Express 2.0
• Supports Jumbo Frames up to 9KBytes
• Automatic crossover detection (MDI/ MDI-X)
• Supports Preboot eXecution Environment (PXE)
• Supports Legacy and Message Signal Interrupt (MSI/MSI-X)
• IEEE 802.3 auto-negotiator - automatic connection configuration for speed, duplex and flow control
• Time stamping and IEEE 1588 Precision Time Protocol
• IEEE 802.3az - Energy Efficient Ethernet (EEE)
• Active State Power Management (ASPM)
• Full wake-up support (APM/ACPI)
• Latency Tolerance Reporting (LTR)
• LED indicator for activity and data transfer mode
• Original Intel chipset, new, not refurbished / B-goods

System / OS

Geprüft / Approved

Verpackung / Packaging





Spezifikation

Specification

Chipsatz:	Intel I350-AM4	Chipset:	Intel I350-AM4
Datentransfer-Rate:	10/100/1000 Mbps	Data transfer rate:	10/100/1000 Mbps
Anschlüsse:	4x RJ45	Connectors:	4x RJ45
Hardwaresysteme:	PCIe x4 bis x16 Slot	Hardware system:	PCIe x4 to x16 slot
Betriebssysteme:	Windows 7/8.x/10/11 (32/64 bit), Server 2003/2008 (R2)/2012 (R2) (32/64 bit), Linux 2.4 oder später	Operating systems:	Windows 7/8.x/10/11 (32/64 bit), Server 2003/2008 (R2)/2012 (R2) (32/64 bit), Linux 2.4 or later
Betriebstemperatur :	0°C bis +55°C	Operating temperature :	32°F up to 131°F
Lagertemperatur:	-20°C bis +85°C	Storage temperature:	-4°F up to 185°F
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	+3.3V vom PCIe Bus	Current Supply:	+3.3V from the PCIe Bus
Abmessung:	68.00 x 168.00 mm	Size:	68.00 x 168.00 mm
Gewicht:	105 g	Weight:	105 g
EAN:	4718359602047	EAN:	4718359602047
Ursprungsland:	China	Country of origin:	China
Lieferumfang:	EX-60204, Low Profile Bügel, Handbuch	Packaging contents:	EX-60204, Low Profile bracket, Manual

Bilder / Pictures

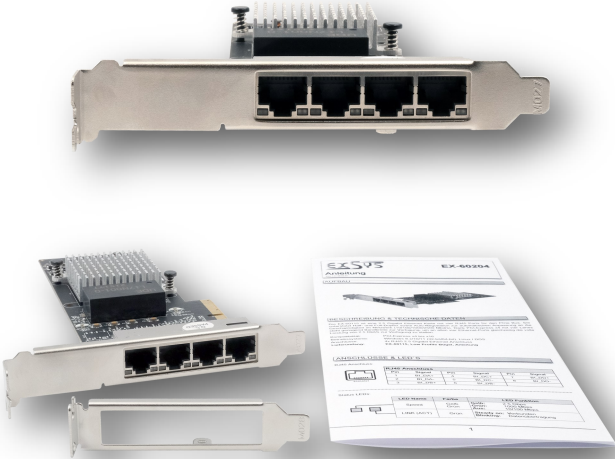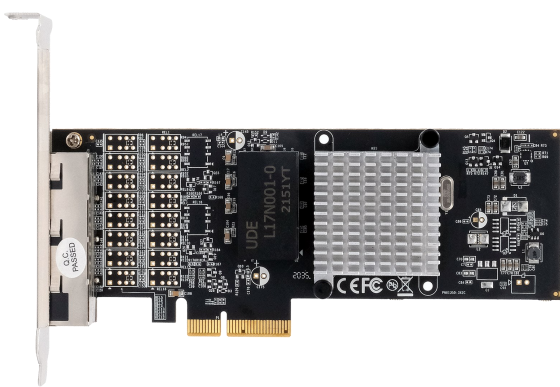

Zubehör / Accessories

EX-1115	Schutzkappe für RJ45 Anschlüsse (10 Stück in einem Pack)
---------	--

EX-1115

