


Bild / Picture



USB zu 1x Seriell RS-232
mit Überspannungsschutz & Isolation

Anwendung / Application

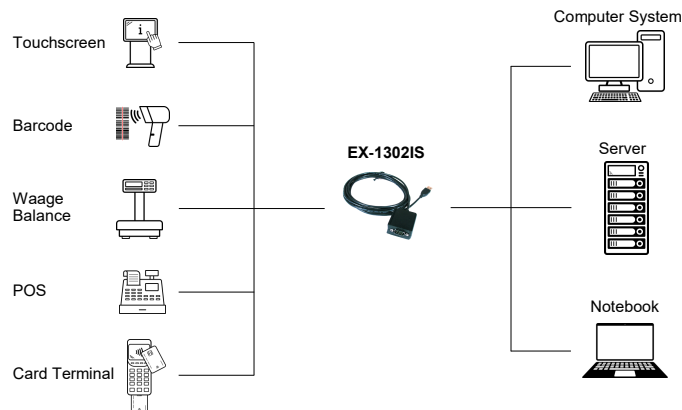

USB to 1x Serial RS-232 port
with Surge Protection & Isolation

Beschreibung

Das USB zu Seriell Kabel EX-1302IS stellt eine serielle RS-232 High Performance UART 16C550 Schnittstelle mit 15KV ESD Überspannungsschutz und 2.5KV Isolation zur Verfügung. Es wurde entwickelt um serielle Geräte am USB 1.1 bis 3.2 Gen 2 Bus eines PCs, Servers oder einer Workstation anzuschließen. Durch die einfache Installation muss der Rechner nicht geöffnet werden und das EX-1302IS kann bei laufendem Betrieb installiert werden.

Description

The EX-1302IS USB to Serial Cable provides a high performance RS-232 UART 16C550 serial interface with 15KV ESD surge protection and 2.5KV isolation. It is designed to connect serial devices to the USB 1.1 to 3.2 Gen 2 bus of a PC, server or workstation. Easy installation means there is no need to open the computer and the EX-1302IS can be installed while the system is running.

Merkmale

Features

Schnittstelle RS-232 V.24	Interface RS-232 V.24
15KV ESD Überspannungs-Schutz und 2.5KV Isolation	15KV ESD Surge Protection and 2.5KV Isolation
16C550 FIFO Buffer mit 16Byte	16C550 FIFO Buffer with 16Byte
I/O Adressen und Interrupt werden vom Betriebssystem vergeben	I/O addresses and interrupt is set from the operating system
Daten Bits: 7 und 8	Data bits: 7 and 8
Stop Bits: 1, 1.5 und 2	Stop bits: 1, 1.5 and 2
Parity: none, even, odd, space und mark	Parity: none, even, odd, space and mark
Signale RS232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND	Signal RS232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Stromversorgung vom USB Bus (Bus Power)	Power from the USB Bus (Bus Power)

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Chip-Set:	FTDI	Chip-Set:	FTDI
Datentransfer-Rate:	300Baud bis 921.6KBaud	Data transfer rate:	300Baud up to 921.6KBaud
Anschlüsse:	1x USB A-Stecker Upstream 1x 9 Pin Seriell RS-232 Stecker	Connectors:	1x USB A-male Upstream connector 1x 9 pin serial RS-232 male connector
Hardwaresysteme:	USB 1.1, 2.0 oder 3.2	Hardware system:	USB 1.1, 2.0 or 3.2
Treiber:	Win98SE/ME/XP/200x/Vista/7/8/10/11 (32&64-Bit) Win Server 20xx/WinCE, Linux, MAC OS 10.x	Driver:	Win98SE/ME/XP/200x/Vista/7/8/10/11 (32&64-Bit) Win Server 20xx/WinCE, Linux, MAC OS 10.x
Betriebssysteme:	Gemäß Treiber	Operating systems:	According to driver
Betriebstemperatur :	0°C bis +55°C	Operating temperature :	32°F up to 131°F
Lagertemperatur:	-40°C bis +75°C	Storage temperature:	-40°F up to 167°F
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	Vom USB Port	Current Supply:	from the USB port
Abmessung:	Kabellänge 1.8 Meter	Size:	Cable length 1.8 meter
Gewicht:	150 g	Weight:	150 g
EAN:	4718359130212	EAN:	4718359130212
Ursprungsland:	Taiwan	Country of origin:	Taiwan
Lieferumfang:	EX-1302IS, Handbuch	Packaging contents:	EX-1302IS, Manual