


Bild / Picture



Anwendung / Application

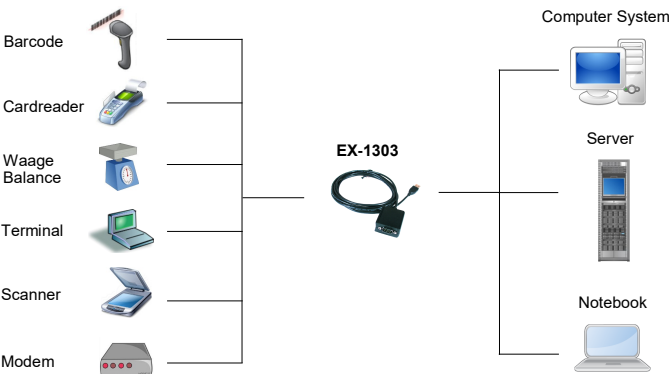

USB zu 1x Seriell RS-422/485
mit 1.8 Meter Kabel, (FTDI Chip-Set)

USB to 1x Serial RS-422/485 port
with 1.8 meter cable (FTDI chip-set)

Beschreibung

Description

Das USB zu RS-422/485 Kabel mit A-Stecker stellt einen seriellen RS-422/485 High Performance UART 16C550 Ausgang zur Verfügung. Er wurde entwickelt, um einen weiteren seriellen Ausgang für PC, kleine Workstation oder Server über den USB 1.1, 2.0 oder 3.2 Bus zu erweitern. Durch die einfache Installation muss der Rechner nicht geöffnet werden und der EX-1303 kann bei laufendem Betrieb installiert werden.

The USB to RS-422/485 cable with A-connector provides a serial RS-422/485 high performance UART 16C550 output. It is designed to extend another serial output for PC, small workstation or server via the USB 1.1, 2.0 or 3.2 bus. Due to the simple installation, the computer does not need to be opened and the EX-1303 can be installed while the system is running.

Merkmale

Features

Schnittstelle RS-422/485	Interface RS-422/485
16C550 FIFO Buffer mit 16Byte	16C550 FIFO Buffer with 16Byte
I/O Adressen und Interrupt werden vom Betriebssystem vergeben	I/O addresses and interrupt is set from the operating system
Daten Bits: 7 und 8	Data bits: 7 and 8
Stop Bits: 1, 1.5 und 2	Stop bits: 1, 1.5 and 2
Parity: none, even, odd, space und mark	Parity: none, even, odd, space and mark
- Signale: Zwei Einstellungen sind möglich: 4-Draht RS-422 (TXD+/-, RXD+/-) 2-Draht RS-485 (Data+/-, Data+/-)	- Signal: two modes are selectable: 4-wire RS-422 (TXD+/-, RXD+/-) 2-wire RS-485 (Data+/-, Data+/-)
Stromversorgung vom USB Bus (Bus Power)	Power from the USB Bus (Bus Power)

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Chip-Set:	FTDI	Chip-Set:	FTDI
Datentransfer-Rate:	300Baud bis 921.6KBaud	Data transfer rate:	300Baud up to 921.6KBaud
Anschlüsse:	1 x USB A-Stecker Upstream 1 x 9 Pin Seriell RS-422/485 Stecker	Connectors:	1 x USB A-male Upstream connector 1 x 9 pin serial RS-422/485 male connector
Hardwaresysteme:	USB 1.1, 2.0 oder 3.2	Hardware system:	USB 1.1, 2.0 or 3.2
Treiber:	Win98SE/ME/XP/200x/Vista/7/8/10/11 (32&64-Bit) Win Server 20xx/WinCE, Linux, MAC OS 10.x	Driver:	Win98SE/ME/XP/200x/Vista/7/8/10/11 (32&64-Bit) Win Server 20xx/WinCE, Linux, MAC OS 10.x
Betriebssysteme:	Gemäß Treiber	Operating systems:	According to driver
Betriebstemperatur :	0°C bis +55°C	Operating temperature :	32°F up to 131°F
Lagertemperatur:	-40°C bis +75°C	Storage temperature:	-40°F up to 167°F
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	Vom USB Port	Current Supply:	from the USB port
Abmessung:	Kabellänge 1.8 Meter	Size:	Cable length 1.8 meter
Gewicht:	150 g	Weight:	150 g
EAN:	4718359013034	EAN:	4718359013034
Ursprungsland:	Taiwan	Country of origin:	Taiwan
Lieferumfang:	EX-1303, Treiber CD, Handbuch	Packaging contents:	EX-1303, Driver CD, Manual