


Bild / Picture

Anwendung / Application



USB 2.0 zu 2x serielle RS-232 Ports
mit 2 Meter Kabel, (FTDI Chip-Set)

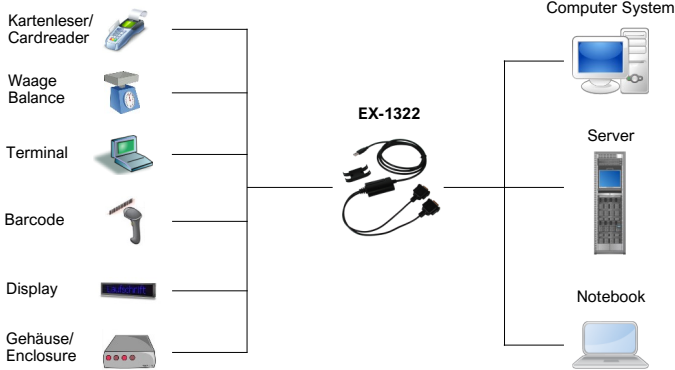

USB 2.0 to 2x serial RS-232 Ports
with 2 Meter Cable (FTDI chip-set)

Beschreibung

Der EX-1322 stellt zwei serielle RS-232 High Performance UART 16C550 Ausgänge zur Verfügung. Er ist entwickelt worden um zwei weitere serielle Ausgänge für Notebook, PC, kleine Workstation oder Server über den USB 2.0 Bus zu erweitern. Durch die einfache Installation muss das Computer System oder Notebook nicht geöffnet werden und der EX-1322 kann einfach bei laufendem Betrieb installiert werden. Zusätzlich wird ein Befestigungsadapter mitgeliefert mit dem man den EX-1322 an die Wand oder in ein 19" Rack installieren kann.

Description

The EX-1322 provides two serial RS-232 High Performance UART 16C550 outputs. It is designed to extend two additional serial outputs for notebook, PC, small workstation or server via the USB 2.0 bus. The simple installation means that the computer system or notebook does not need to be opened and the EX-1322 can be easily installed while the system is running. In addition, a mounting adapter is supplied with which the EX-1322 can be installed on the wall or in a 19" rack.

Merkmale

Features

Schnittstelle RS-232	Interface RS-232
16C550 FIFO Buffer mit 16Byte	16C550 FIFO Buffer with 16Byte
Daten Bits: 7 und 8	Data Bits: 7 and 8
Stop Bits: 1, 1.5 und 2	Stop Bits: 1, 1.5 and 2
Parität: None, Even, Odd, Space oder Mark	Parity: None, Even, Odd, Space or Mark
RS232 Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND	RS232 Signals: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Stromversorgung vom USB-Bus (Bus Power)	Power from the USB-Bus (Bus Power)

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Chip-Set:	FTDI	Chip-Set:	FTDI
Datentransfer-Rate:	300Baud bis 921.6KBaud	Data Transfer Rate:	300Baud up to 921.6KBaud
Anschlüsse:	1x USB 2.0 A-Stecker Upstream 2x 9-Pin Seriell RS-232 Anschlüsse	Connectors:	1x USB 2.0 A-Male Upstream Connector 2x 9-Pin Serial RS-232 Connectors
Hardwaresysteme:	USB 1.1, 2.0 oder 3.2	Hardware System:	USB 1.1, 2.0 or 3.2
Treiber:	Windows 98 / 2000 / XP / Vista / 7 / 8.x / 10 / 11 / CE / Server 20xx / Linux / Mac OS	Driver:	Windows 98 / 2000 / XP / Vista / 7 / 8.x / 10 / 11 / CE / Server 20xx / Linux / Mac OS
Betriebssysteme:	Gemäß Treiber	Operating Systems:	According to Driver
Betriebstemperatur:	0°C bis +55°C	Operating Temperature:	32°F up to 131°F
Lagertemperatur:	-40°C bis +75°C	Storage Temperature:	-40°F up to 167°F
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	Vom USB-Port	Current Supply:	From the USB-Port
Abmessung:	Kabellänge 2 Meter	Size:	Cable Length 2 Meter
Gewicht:	250g	Weight:	250g
EAN:	4718359013225	EAN:	4718359013225
Ursprungsland:	Taiwan	Country of Origin:	Taiwan
Lieferumfang:	EX-1322, Treiber CD, Handbuch	Packaging Contents:	EX-1322, Driver CD, Manual