


Bild / Picture



USB 2.0 zu 4x serielle RS-232 Ports
mit 2 Meter Kabel, (FTDI Chip-Set)

Anwendung / Application

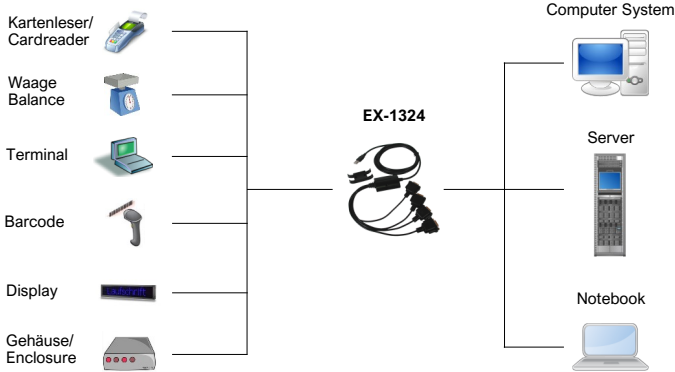

USB 2.0 to 4x serial RS-232 Ports
with 2 Meter Cable (FTDI chip-set)

Beschreibung

Der EX-1324 stellt vier serielle RS-232 High Performance UART 16C550 Ausgänge zur Verfügung. Er ist entwickelt worden um vier weitere serielle Ausgänge für Notebook, PC, kleine Workstation oder Server über den USB 2.0 Bus zu erweitern. Durch die einfache Installation muss das Computer System oder Notebook nicht geöffnet werden und der EX-1324 kann einfach bei laufendem Betrieb installiert werden. Zusätzlich wird ein Befestigungsadapter mitgeliefert mit dem man den EX-1324 an die Wand oder in ein 19" Rack installieren kann.

Description

The EX-1324 provides four serial RS-232 High Performance UART 16C550 outputs. It is designed to extend four additional serial outputs for notebook, PC, small workstation or server via the USB 2.0 bus. Due to the simple installation, the computer system or notebook does not have to be opened and the EX-1324 can be easily installed during operation. In addition, a mounting adapter is supplied with which the EX-1324 can be installed on the wall or in a 19" rack.

Merkmale

Schnittstelle RS-232
16C550 FIFO Buffer mit 16Byte
Daten Bits: 7 und 8
Stop Bits: 1, 1.5 und 2
Parität: None, Even, Odd, Space oder Mark
RS232 Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Stromversorgung vom USB-Bus (Bus Power)

Features

Interface RS-232
16C550 FIFO Buffer with 16Byte
Data Bits: 7 and 8
Stop Bits: 1, 1.5 and 2
Parity: None, Even, Odd, Space or Mark
RS232 Signals: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Power from the USB-Bus (Bus Power)

System / OS



Geprüft / Approved



Verpackung / Packaging



Spezifikation

Specification

Chip-Set:	FTDI	Chip-Set:	FTDI
Datentransfer-Rate:	300Baud bis 921.6KBaud	Data Transfer Rate:	300Baud up to 921.6KBaud
Anschlüsse:	1x USB 2.0 A-Stecker Upstream 4x 9-Pin Seriell RS-232 Anschlüsse	Connectors:	1x USB 2.0 A-Male Upstream Connector 4x 9-Pin Serial RS-232 Connectors
Hardwaresysteme:	USB 1.1, 2.0 oder 3.2	Hardware System:	USB 1.1, 2.0 or 3.2
Treiber:	Windows 98 / 2000 / XP / Vista / 7 / 8.x / 10 / 11 / CE / Server 20xx / Linux / Mac OS	Driver:	Windows 98 / 2000 / XP / Vista / 7 / 8.x / 10 / 11 / CE / Server 20xx / Linux / Mac OS
Betriebssysteme:	Gemäß Treiber	Operating Systems:	According to Driver
Betriebstemperatur:	0°C bis +55°C	Operating Temperature:	32°F up to 131°F
Lagertemperatur:	-40°C bis +75°C	Storage Temperature:	-40°F up to 167°F
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	Vom USB-Port	Current Supply:	From the USB-Port
Abmessung:	Kabellänge 2 Meter	Size:	Cable Length 2 Meter
Gewicht:	350g	Weight:	350g
EAN:	4718359013249	EAN:	4718359013249
Ursprungsland:	Taiwan	Country of Origin:	Taiwan
Lieferumfang:	EX-1324, Treiber CD, Handbuch	Packaging Contents:	EX-1324, Driver CD, Manual